

# SYNCRRA

Multifunctional pump for aquarium, fountain, protein skimmer etc.

SICCE green technology today

Thermal protection



Prechamber +  
flow regulator

Strong suction cups

Syncra Silent, with its innovative technology, is versatile with a range of uses. Ideal for fresh and salt water aquariums, protein skimmers, calcium reactors, indoor & outdoor fountains, water-cooling, and all submersible and inline applications which require high performance and total silence. High energy savings, quiet operation, reliability, powerful performance, and resistance to harsh conditions.

- Quiet operation
- From 185 gph to 1321 gph

Wet & Dry application



**SICCE USA**  
865-291-3202  
FAX 865-291-3203  
sales@sicceus.com  
www.sicceus.com



:Syncra 0.5	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 8	WATT 8
A 0,06	A 0,12
H-m 1,2	Feet 3,9
l/h max 700 gph US 185	

:Syncra 1.0	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 16	WATT 16
A 0,14	A 0,25
H-m 1,5	Feet 4,9
l/h max 950 gph US 251	

:Syncra 1.5	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 23	WATT 23
A 0,17	A 0,43
H-m 1,8	Feet 5,9
l/h max 1350 gph US 357	

:Syncra 2.0	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 32	WATT 35
A 0,30	A 0,65
H-m 2	Feet 6,5
l/h max 2150 gph US 568	


:Syncra 2.5	
VOLT 240 ~	
Hz 50	
WATT 40	
A 0,30	
H-m 2,4	
l/h max 2400	

:Syncra 3.0	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 45	WATT 48
A 0,21	A 0,43
H-m 3	Feet 9,8
l/h max 2700 gph US 714	

:Syncra 3.5	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 65	WATT 68
A 0,34	A 0,7
H-m 3,7	Feet 12,5
l/h max 2500 gph US 660	

:Syncra 4.0	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 80	WATT 85
A 0,40	A 0,95
H-m 3,7	Feet 12,5
l/h max 3500 gph US 951	

:Syncra 5.0	
VOLT 240 ~	VOLT 120 ~
Hz 50	Hz 60
WATT 105	WATT 105
A 0,60	A 0,95
H-m 3,8	Feet 12,5
l/h max 5000 gph US 1321	

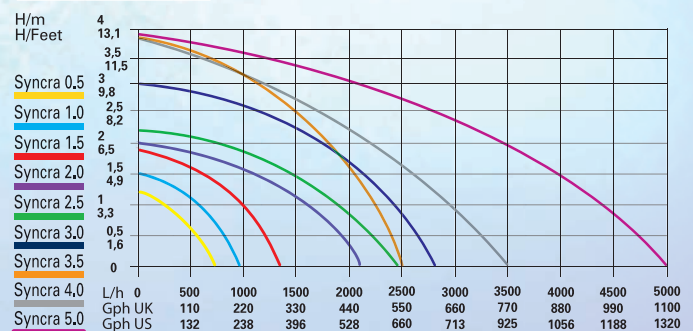

## Syncra Pumps

Syncra Silent, with its innovative technology, is versatile with a range of uses. Ideal for fresh and salt water aquariums, protein skimmers, calcium reactors, indoor & outdoor fountains, water-cooling, and all submersible and inline applications which require high performance and total silence. High energy savings, quiet operation, reliability, powerful performance, and resistance to harsh conditions. Quiet operation.



RSYG01U	Syncra 0.5	185gph	4' max head pressure
RSYG02U	Syncra 1.0	251gph	5' max head pressure
RSYI02U	Syncra 1.5	357gph	6' max head pressure
RSYM02U	Syncra 2.0	568gph	7.9' max head pressure
RSYH03U	Syncra 3.0	714gph	9.9' max head pressure
RSYN02U	Syncra 3.5	660gph	12.5' max head pressure
RSYN03U	Syncra 4.0	951gph	12.5' max head pressure
RRSYN01U	Syncra 5.0	1321gph	12.5' max head pressure



## Syncra Pond Pump with Fountain

Includes fountain and intake filter. Fountain includes: waterbell, waterlily, single daisy, and double daisy fountain heads. 20ft grounded cord.



RSYG01V	SyncraPond 0.5	185gph	4' max head pressure
RSYG11V	SyncraPond 1.0	251gph	5' max head pressure
RSYI10V	SyncraPond 1.5	357gph	6' max head pressure
RSYM10V	SyncraPond 2.0	568gph	7.9' max head pressure
RSYH10V	SyncraPond 3.0	714gph	9.9' max head pressure
RSYN11V	SyncraPond 3.5	660gph	12.5' max head pressure
RSYN12V	SyncraPond 4.0	951gph	12.5' max head pressure
RSYN10V	SyncraPond 5.0	1321gph	12.5' max head pressure

## Syncra DW Pond Pump

Syncra DW is ideal for waterfalls, ponds, pond surface skimmers, water gardening, and drainage applications. Designed to handle debris. 20ft grounded cord.

RSYM20V	SyncraDW 2.0	568gph	7.9' max head pressure
RSYH20V	SyncraDW 3.0	714gph	9.9' max head pressure
RSYN20V	SyncraDW 3.5	660gph	12.5' max head pressure
RSYN21V	SyncraDW 4.0	951gph	12.5' max head pressure
RSYN22V	SyncraDW 5.0	1321gph	12.5' max head pressure



## MI MOUSE Pumps

Submersible recirculation pump for every type of aquarium, terrarium, internal, or external fountain. Variable flow rate regulator as well as adaptors to connect flexible hoses from 13mm to 20mm. Bi polar cord or grounded cord.

PRT810	MI MOUSE	82gph	bi polar cord	1.8' max head pressure
PRT821	MI MOUSE	82gph	6ft grounded cord	1.8' max head pressure

### The SICCE advantage Synchronous Motors

- increased efficiency
- longer life
- less vibration
- quieter operation
- pays for itself in electrical savings

## MICRA Pumps

Suction inlet is located on the bottom of the pump. Submersible recirculation pump for every type of aquarium, terrarium, internal or external fountain. Variable flow rate regulator as well as adaptors to connect flexible hoses from 13mm to 20mm.

Adaptors for flexible tubing.

PRM832	MICRA	90gph	bi polar cord	1.9' max head pressure
PRM831	MICRA	90gph	grounded cord	1.9' max head pressure
PRM833	MICRAPLUS	158gph	bi polar cord	2.8' max head pressure
PRM830	MICRAPLUS	158gph	grounded cord	2.8' max head pressure



SICCE green technology today

SICCE USA  
865-291-3202  
FAX 865-291-3203  
sales@sicceus.com